

# Product Catalog

Wi-Fi and Wireless Networks

Antennas | Mounts | Enclosures | Cabling and more



## Table of Contents

Antennas -----	<b>3-7</b>
Mounts -----	<b>8-9</b>
Enclosures -----	<b>10-11</b>
Customization -----	<b>12</b>
Cabling -----	<b>13-17</b>
Power Solutions -----	<b>18-20</b>
Site Survey Tools -----	<b>20</b>

# Compatible with all major AP Manufacturers



## Antennas DAS



### **ATS-OO-DAS-23-1NP-8**

698-960/1710-2700 MHZ 2/3 DBI Tear Drop Ceiling Omni Antenna with N-Style

**Frequency**

698-960 / 1710-3800 MHz

**Gain**

2/3 dBi

**Beamwidth**

Horizontal: 360° | Vertical: 144° / 144°

**Dimensions**

8"x 4.57" (204x116mm)

**Connector**

N-Style Plug



### **ATS-OO-DAS-35-1NP-8**

698-960/1710-2700 MHZ 3/5 DBI Flush Ceiling Mount Omni Antenna with N-Style

**Frequency**

698-960/1710-3800 MHz

**Gain**

3/5 dBi

**Beamwidth**

Horizontal: 75°/50°/60° | Vertical: 75°/50°/60°

**Dimensions**

8.4"x1.77" (213x45mm)

**Connector**

N-Style Plug

## Antennas Mist AP45E 10-Element



### **ATS-OO-2456-466-10MPC-36**

2.4/5/6 GHZ 4/6/6 DBI 10 Element Indoor Omni Antenna with 10 MPC

**Frequency**

2.4-2.48/5.15-5.85/6-7.125 GHz

**Gain**

4/6/6 dBi

**Beamwidth**

Horizontal: 360° | Vertical: 105°

**Dimensions**

6.5"x 6.3"(165mm D x 160mm H)

**Connector**

4MPC & 6MPC



### **ATS-OP-2456-7-10MPC-36**

2.4/5/6 GHZ 7 DBI 10 Element Indoor Patch Antenna with 10 MPC

**Frequency**

2.4-2.48/5.15-5.85/6-7.125 GHz

**Gain**

7 dBi

**Beamwidth**

Horizontal: 120°/105°/105° | Vertical: 75°/60°/60°

**Dimensions**

11.8"x 11.8"x 1.85"(300x300x47mm)

**Connector**

TNC Plug

# Antennas

## Omnidirectional



### **ATS-ID90RD-245-23-1RPSP-IC-W**

2.4/5 GHz 2/3 dBi White Indoor Articulating Rubber Duck Antenna with RPSMA

**Frequency**

2.4-2.5/4.9-5.85 GHz

**Gain**

2/3 dBi

**Beamwidth**

Horizontal: 360°

**Dimensions**

0.51" x 5.14" (13x130.5mm)

**Connector**

RPSMA, RPTNC and N-Style



### **ATS-OO-245-37-1NP-IC-W**

2.4/5 GHz 3/7 dBi Outdoor Omnidirectional Antenna with N-Style Plug

**Frequency**

2.4-2.484/5.1-5.85 GHz

**Gain**

3/7 dBi

**Beamwidth**

Horizontal: 360° | Vertical: 50° / 30°

**Dimensions**

10.8"L (27.5cm)

**Connector**

RPSMA, RPTNC and N-Style



### **ATS-OO-245-46-4NP-36**

2.4/5 GHz 4/6 dBi 4 Element Omnidirectional Antenna with N-Style

**Frequency**

2.4-2.5/4.9-5.85 GHz

**Gain**

4/6 dBi

**Beamwidth**

Horizontal: 360° | Vertical: 144° / 55°

**Dimensions**

4.7" x 2.8 (120x70mm)

**Connector**

RPSMA, RPTNC and N-Style



### **ATS-OO-245-46-6RPSP-36**

2.4/5 GHz 4/6Bi 6-Element Omni Antenna with RPSMA

**Frequency**

2.4-2.5/4.9-5.85 GHz

**Gain**

4/6 dBi

**Beamwidth**

Horizontal: 360° | Vertical: 61° / 39°

**Dimensions**

6.1" x 2.8" (154x70mm)

**Connector**

RPSMA, RPTNC and N-Style



### **ATS-OO-2456-466-8PRADART-ND-36**

2.4/5/6 GHz 4/6/6dBi 8-Element Omni Antenna with Right-Angle DART

**Frequency**

2.4-2.5/4.9-5.85 GHz

**Gain**

4/6/6 dBi

**Beamwidth**

Horizontal: 360° | Vertical: 105° / 75° / 75°

**Dimensions**

6.5" x 3.25" (165x82.5mm)

**Connector**

RPSMA, RPTNC and N-Style

# Antennas

## Patch



### **ATS-OP-245-13-4RPTP-36**

2.4/5 GHz 13dBi 4-Element Patch Antenna with RPTNC

**Frequency**

2.4-2.485 / 5.15-5.85 GHz

**Gain**

13 dBi

**Beamwidth**

Horizontal: 15° | Vertical: 120°

**Dimensions**

13.77"x13.77"x1.37" (350x350x50mm)

**Connector**

RPSMA, RPTNC and N-Style



### **ATS-OP-245-8-6RPSP-36**

2.4/5 GHz 6-Element Patch Antenna with RPSMA

**Frequency**

2.4-2.5 / 5.1-5.85 GHz

**Gain**

8 dBi

**Beamwidth**

Horizontal: 100° | Vertical: 40° / 25°

**Dimensions**

13.77"x13.77"x1.37" (350x350x50mm)

**Connector**

RPSMA, RPTNC and N-Style



### **ATS-OP-245-8-4RPTP-36**

2.4/5 GHz 8dBi 4-Element Patch Antenna with RPTNC

**Frequency**

2.4-2.485 / 5.15-5.85 GHz

**Gain**

8 dBi

**Beamwidth**

Horizontal: 125° / 114° | Vertical: 35° / 24°

**Dimensions**

12.6"x6.7"x1.4" (320x170x35mm)

**Connector**

RPSMA, RPTNC and N-Style



### **ATS-OP-2456-6-8PDART-ND-36**

2.4/5/6 GHz 6dBi 8-Element Patch Antenna with DART

**Frequency**

2.4-2.48/5.1-5.85/6-7.125 GHz

**Gain**

6 dBi

**Beamwidth**

Horizontal: 70°/70°/70° | Vertical: 70° / 70° / 70°

**Dimensions**

11.81"x11.81"x2.36" (300x300x60mm)

**Connector**

Right-Angle DART-8, straight DART-8 and RPSMA



### **ATS-OP-245-7D-6RPSP-36**

2.4/5 GHz 7 dBi 6-Element Dual-Polarity 60/60 Patch Antenna with RPSMA

**Frequency**

2.4-2.5/4.9-5.85 GHz

**Gain**

7 dBi

**Beamwidth**

Horizontal: 66°/ 65° | Vertical: 66° / 62°

**Dimensions**

12.2"x8.66"x1.57" (310x220x40mm)

**Connector**

RPSMA, RPTNC and N-Style

## ATS-OO-9in1-2832-5SP-4RPSP-18

GPS/LTE/CBRS/Wi-Fi 9-Element Omni Antenna with SMA and RPSMA



**Frequency**

1575.42-1610 MHz  
698-960/1710-2690 MHz  
2.4-2.482/4.9-5.825 GHz

**Gain**

25 dB/ 3 dBi / 2 dBi

**Polarization**

Right Hand Circular / Linear

**Dimensions**

5.1"x2.6" (130x65mm)

**Connector**

5 SMA (1 GPS & 4 LTE/CBRS) | 4 RPSMA (Wi-Fi)

## ATS-OO-7in1-2832-3SP-4RPSP-144

GPS/LTE/Wi-Fi 7-Element Omni Antenna with SMA and RPSMA



**Frequency**

1575.42-1610 MHz  
698-960/1710-2690 MHz  
2.4-2.482/4.9-5.825 GHz

**Gain**

25 dB/ 3 dBi / 2 dBi

**Polarization**

Right Hand Circular / Linear

**Dimensions**

4.33"x2.09" (110x53mm)

**Connector**

3 SMA (1 GPS & 2 LTE/CBRS) | 4 RPSMA (Wi-Fi)

## ATS-OO-3in1-2823-2SP-1RPSP-18

GPS/LTE/Wi-Fi 3-Element Omni Antenna with SMA and RPSMA



**Frequency**

1570.42-1580.42 MHz  
1625.42 / 1525.42 MHz  
698-960/ 1710-2655 MHz  
2.4-2.483 GHz

**Gain**

2 dBi/28 dB/2 dBi/3 dBi

**Polarization**

Right Hand Circular / Linear

**Dimensions**

1.97"x1.89" (50x48mm)

**Connector**

2 SMA (GPS & LTE) | 1 RPSMA (Wi-Fi)

**List Price**

# Antennas

## Directional Cellular



### **ATS-OP-LTE-11-1NP-12**

698-960/1710-2700 MHz 11 dBi LTE Patch Antenna with N-Style Plug

Frequency	Gain	Beamwidth
698-960/1710-2700 MHz	11 dBi	Horizontal: 50°/ 65°   Vertical: 40° / 50°
Dimensions	Connector	
17.4"x 2.55" x 8.29" (442x65x210.6mm)	N-Style Plug	



### **ATS-OP-LTE-9-2SP-36**

LTE/CBRS 2-Element 9 dBi Patch Antenna with SMA

Frequency	Gain	Beamwidth
698-960/1710-2690/3300-4200 MHz	6/9/9 dBi	Horizontal: 75°/50°/60°   Vertical: 75°/50°/60°
Dimensions	Connector	
13.77"x13.77"x1.37" (350x350x50mm)	SMA (2)	

# Antennas

## Omnidirectional Cellular



### **ATS-ID90RD-LTE-2-1SP-IC-W**

698-960/1710-2700 MHz 2 dBi LTE Omni Antenna with SMA Plug

Frequency	Gain	Beamwidth
698-960/1710-2700 MHz	2 dBi	Horizontal: 360°   Vertical: 90°
Dimensions	Connector	
8.58"x 1.02" x 0.53" (218x26x13.5mm)	SMA Plug	



### **ATS-ID90RD-LTE-2-1TP-IC-W**

698-960/1710-2700 MHz 2 dBi LTE Omni Antenna with TNC Plug

Frequency	Gain	Beamwidth
698-960/1710-2700 MHz	2 dBi	Horizontal: 360°   Vertical: 90°
Dimensions	Connector	
8.58"x 1.02" x 0.53" (218x26x13.5mm)	TNC Plug	

# Enclosures



## **ATS-ENC-12164P-LB**

12x16x4 Polycarbonate Lock Box Enclosure

### **Dimensions**

12"x16"x4" (304.8x406.4x101.6mm)

### **Installation**

Indoor on Wall

- Features:**
- Includes mounting bracket & universal mounting plate for multiple mount options
  - Opaque Door
  - Knockouts available on the sides for raceway and conduit



## **ATS-14126P-S-L-CG-POE-HC**

14x12x6 Heated & Cooled PoE Enclosure with Cord Grip

### **Dimensions**

14.5"x12"x6.6" (370.8x304.8x165.1mm)

### **Installation**

Indoor or Outdoor on Wall or on Pole

- Features:**
- Solid Door, Latch Lock
  - Designed for temperature-limiting environment
  - Includes heater, fan and thermostat



## **ATS-NL-IC-ENC-15153**

15x15x3" Non-Ligature In-Ceiling Enclosure

### **Dimensions**

14.5"x14.5"x2.96" (368x368x75mm)

### **Installation**

Indoor on Wall

- Features:**
- Enclosure flush mounts in a wall or ceiling
  - Cover fastened with Torx security screws
  - Flush mount prevents tampering of network equipment



## **ATS-BOLMNT-11-STDBRN**

46" x 11" Standard Brown Bollard

### **Dimensions**

46.5" x 11.50" (1181x292.1mm)

### **Installation**

Outdoor

- Features:**
- Protects network equipment in outdoor environments
  - Allows extension of RF coverage into outdoor locations like parking lots



## **ATS-14126P-S-K-NH-UBPTB**

14x12x6 Polycarbonate Enclosure with Solid Door, Key Lock, No Holes

### **Dimensions**

14"x12"x6" (355.6x304.8x152.4mm)

### **Installation**

Indoor or Outdoor

- Features:**
- Protects network equipment from environmental threats and tampering
  - Solid Door, Key Lock



# Enclosures



## **ATS-USE-12148**

12x14x8 Under Seat Enclosure

### **Dimensions**

12"Lx14"Wx8"D (304.8mm L x 355.6mm W x 203.2mm D)

### **Installation**

Indoor or Outdoor

### **Features:**

- Protects equipment from outdoor environmental threats and tampering
- Can be customized for specific applications



## **ATS-IC-ENC-CVDLB-15153**

15x15x3 In Ceiling Hard Cap Covered Lock Box Enclosure

### **Dimensions**

15.5"x15.5"x3.05" (393.7x393.7x77.4mm)

### **Installation**

Indoor

### **Features:**

- Flush mounts into wall or ceiling
- Front panel secured by key lock



## **ATS-14126P-S-L-CG-POE-H**

14x12x6 Heated POE Enclosures with Cord Grip

### **Dimensions**

14.6"x12"x6.6" (370.8x304.8x165.1mm)

### **Installation**

Indoor or Outdoor

### **Features:**

- Protects network equipment in temperature-limiting environments
- Comes pre-configured with heated enclosure components installed



## **ATS-14126P-S-L-CG-UBPTB-INTOO-46-4RPSP**

14x12x6 Solid Latch Enclosures and Integrated 4 Lead 4/6 DBI RPSMA Omni

### **Dimensions**

14" H x 12" W x 6" D (355.6 mm H x 304.8 mm W x 152.4 mm D)

### **Installation**

Indoor or Outdoor

### **Features:**

- Solution comes pre-drilled and ready for installation
- Includes pre-installed 4-Element omni antenna



## **ATS-CT-MERAKI5-2x2**

Meraki AP Suspended Ceiling Tile Enclosure Mount (MR56 Style)

### **Dimensions**

23.75"L x 23.75"W x 1.5"D (603.25mm Lx603.25mm Wx38.1mm D)

### **Installation**

Indoor

### **Features:**

- Secures & protects a Meraki MR56 within a standard 2x2 ceiling tile grid
- Easy to install

# Mounts

## **ATS-APLBKT-COV-UNIV1-V2**

Universal AP L Bracket Wall Mount with Cover V2



### **Dimensions**

5.2" H x 7.4" W x 9.8" D (132mm H x 188mm W x 250mm D)

### **Installation**

Indoor on Wall

### **Features:**

- Allows an AP to be mounted to wall
- Cover hides cabling and power cords to maintain aesthetics

## **ATS-DRPMNT-UNIV1**

Universal AP All-Thread Drop Mount



### **Dimensions**

7.3" L x 7.1" W x 4.3" H (185mm L x 180mm W x 110mm H)

### **Installation**

3/8" All Thread or Beam Clamp

### **Features:**

- AP easily installs using pre-defined keyholes or T-Bar mount
- Mount can be installed using 3/8" All-Thread or Beam Clamp

## **ATS-APMNT-CORNER**

AP Corner Mount for the Mist AP 61 and Mist AP 63



### **Dimensions**

20.32" x 7 x 4.27" (516.13 x 177.8 x 108.46mm)

### **Installation**

Indoor or Outdoor

### **Features:**

- Allows for APs to be mounted in a corner location
- Can accommodate different APs with correct adapter brackets

## **ATS-APANTARTMNT-UNIV3**

Universal AP and Antenna Articulating Mount V3



### **Dimensions**

10.9"L x 8.3"W x 10.5" H (277 x 210 x 266mm)

### **Installation**

3/8" All-Thread Mount, Ceiling, I-Beam, Metal Strapping, Wall

### **Features:**

- Includes new mounting hole patterns to accommodate newer APs
- Modified all-thread mounting bracket to enhance security & safety

## **ATS-COV-117511754-WHT-ASA**

11.75" X 11.75" X 4" White ASA AP Cover



### **Dimensions**

12" H x 12" W x 4" D (304.8 mm H x 304.8 mm W x 101.6 mm D)

### **Installation**

Indoor

### **Features:**

- Allows an AP to be mounted to wall or ceiling
- Opaque cover provides protection and conceals APs

# Mounts



## **ATS-DRPMNT-UNIV1-STGXTD-OOOP**

Staggered AP and Antenna All-Thread Drop Mount

### **Dimensions**

23.62"x10.24"x4.08" (600x260x103.6mm)

### **Installation**

3/8" All-Thread or Beam Clamp

### **Features:**

- Can interchange antenna or AP in the top or bottom position
- Opening for antenna leads
- AP mounting plate can be adjusted for AP mounting
- Beam clamp mounting designed to allow adjustments to meet beam clamp size



## **ATS-DRPMNT-DAP-QOP**

Dual AP and Quad Antenna All-Thread Drop Mount

### **Dimensions**

30.9"W x 9.59"H (with arms)  
9.45"W x 9.59"H (w/o arms)

### **Installation**

All-Thread or Beam Clamp

### **Features:**

- Can install up to two APs
- Can install up to four antennas



## **ATS-APANTARTMNT-UNIV2**

Universal AP and Antenna Articulating Mount V2

### **Dimensions**

10.9"x8.3"x10.5" (277x210x266mm)

### **Installation**

Wall, Ceiling, I-Beam, 3/8" All-Thread, Metal Strapping

### **Features:**

- Insert holes for APs that use DART cables
- Maximum horizontal & vertical antenna articulation
- Variety of mounting options including beam clamps, 3/8" All-Thread, flush-wall or ceiling mount



## **ATS-APMNT-FLUSH**

AP Flush Mount for the Mist AP61 and Mist AP63

### **Dimensions**

19.7"x12"x4" (497.1x304.8x101.6mm)

### **Installation**

Wall

### **Features:**

- Allows for APs to be mounted in a flush location
- Can accommodate different manufacturer APs with correct adapter brackets
- Powder-coated finish for indoor or outdoor installation



## **ATS-APLBKT-UNIV1**

Universal AP L-Bracket Wall Mount

### **Dimensions**

5.1"x7.1"x9.7" (130x180x246mm)

### **Installation**

Wall


### **Features:**

- Allows for APs to be mounted on a wall while maintaining the preferred horizontal orientation to the ground
- Easy installation of AP
- Covered version available


# Customization

AccelTex Solutions offers the additional service of customizing products for specific environments. From enclosures tailored for specialized use and particular locations to skinning products to maintain aesthetics, AccelTex helps clients achieve maximum efficiency for their networks

## Custom Enclosures

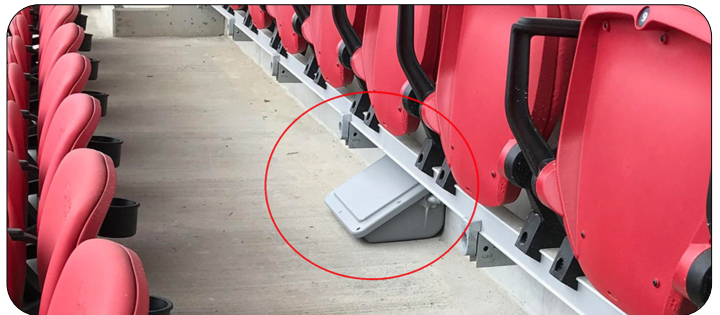

## Skins

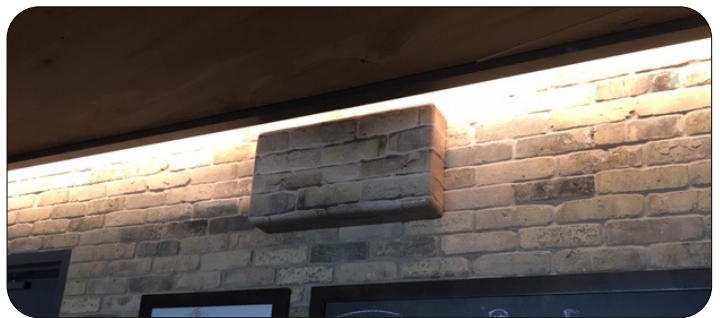

## DART to N-Style

<b><u>ATS-100-4PDART-NP-10in</u></b>	100 Series 4-Port DART to N-Style Plug 10" Cable Assembly
<b><u>ATS-100-4PDART-NP-2ft</u></b>	100 Series 4-Port DART to N-Style Plug 2' Cable Assembly
<b><u>ATS-100-4PDART-NP-3ft</u></b>	100 Series 4-Port DART to N-Style Plug 3' Cable Assembly
<b><u>ATS-100-8PRADART-ND-NP-10in</u></b>	100 Series 8-Port Right Angle DART to N-Style Plug 10" Cable Assembly
<b><u>ATS-100-8PRADART-ND-NP-2ft</u></b>	100 Series 8-Port Right Angle DART to N-Style Plug 2' Cable Assembly



## DART to RPTNC

<b><u>ATS-100-4PDART-RPTNCBHJ-10in</u></b>	100 Series 4-Port DART to RPTNC Bulkhead Jack 10" Cable Assembly
<b><u>ATS-100-4PDART-RPTNCBHJ-2ft</u></b>	100 Series 4-Port DART to RPTNC Bulkhead Jack 2' Cable Assembly
<b><u>ATS-100-4PDART-RPTNCBHJ-3ft</u></b>	100 Series 4-Port DART to RPTNC Bulkhead Jack 3' Cable Assembly
<b><u>ATS-100-8PRADART-ND-RPTNCBHJ-10in</u></b>	100 Series 8-Port Right Angle DART to N-Style Plug 10" Cable Assembly
<b><u>ATS-100-8PRADART-ND-RPTNCBHJ-2ft</u></b>	100 Series 8-Port Right Angle DART to N-Style Plug 2' Cable Assembly



## N-Style to N-Style

<b><u>ATS-100-NBHJ-NP-18in</u></b>	100 Series N-Style Bulkhead Jack to N-Style Plug 18" Cable Assembly
<b><u>ATS-195-NJ-NP-5ft</u></b>	195 Series N-Style Jack to N-Style Plug 5' Cable Assembly
<b><u>ATS-240-NJ-NP-10ft</u></b>	240 Series N-Style Jack to N-Style Plug 10' Cable Assembly
<b><u>ATS-600-NJ-NP-75ft</u></b>	600 Series N-Style Jack to N-Style Plug 75' Cable Assembly
<b><u>ATS-400-NP-NP-20ft</u></b>	400 Series N-Style Plug to N-Style Plug 20' Cable Assembly



## N-Style to RPSMA

Available with N-Style Jack, N-Style Plug, Right-Angle N-Style Plug, RPSMA Plug, RPSMA Jack connectors

<b><u>ATS-100-NJ-RPSMAP-18in</u></b>	100 Series N-Style Jack to RPSMA Plug 18" Cable Assembly
<b><u>ATS-195-NP-RPSMAJ-3ft</u></b>	195 Series N-Style Plug to RPSMA Jack 3' Cable Assembly
<b><u>ATS-195-NP-RPSMAJ-5ft</u></b>	195 Series N-Style Plug to RPSMA Jack 5' Cable Assembly
<b><u>ATS-195-RANP-RPSMAP-3ft</u></b>	195 Series Right Angle N-Style Plug to RPSMA Plug 3' Cable Assembly
<b><u>ATS-240-RANP-RPSMAP-5ft</u></b>	240 Series Right Angle N-Style Plug to RPSMA Plug 5' Cable Assembly



## RPTNC to RPTNC

Available with RPTNC Plug, RPTNC Jack, RPTNC Bulkhead Jack, Right Angle RPTNC Plug connectors

<b><u>ATS-100-RPTNCBhj-RARPTNCP-18in</u></b>	100 Series RPTNC Bulkhead Jack to Right Angle RPTNC Plug 18" Cable Assembly
<b><u>ATS-100-RPTNCBhj-RPTNCP-18in</u></b>	100 Series RPTNC Bulkhead Jack to RPTNC Plug 18" Cable Assembly
<b><u>ATS-195-RPTNCJ-RPTNCP-5ft</u></b>	195 Series RPTNC Jack to RPTNC Plug 5' Cable Assembly
<b><u>ATS-400-RPTNCJ-RPTNCP-20ft</u></b>	400 Series RPTNC Jack to RPTNC Plug 20' Cable Assembly
<b><u>ATS-600-RPTNCJ-RPTNCP-75ft</u></b>	600 Series RPTNC Jack to RPTNC Plug 75' Cable Assembly



## RPSMA to RPSMA

Available with RPSMA Plug, RPSMA Jack, RPSMA Bulkhead Jack, Right Angle RPSMA Plug connectors

<b><u>ATS-100-RPSMABhj-RARPSMA-18in</u></b>	100 Series RPSMA Bulkhead Jack to Right Angle RPSMA Plug 18" Cable Assembly
<b><u>ATS-100-RPSMABhj-RPSMAP-18in</u></b>	100 Series RPSMA Bulkhead Jack to RPSMA Plug 18" Cable Assembly
<b><u>ATS-195-RPSMAJ-RPSMAP-5ft</u></b>	195 Series RPSMA Jack to RPSMA Plug 5' Cable Assembly
<b><u>ATS-240-RPSMAJ-RPSMAP-10ft</u></b>	240 Series RPSMA Jack to RPSMA Plug 10' Cable Assembly
<b><u>ATS-400-RPSMAJ-RPSMAP-20ft</u></b>	400 Series RPSMA Jack to RPSMA Plug 20' Cable Assembly



## RPSMA to RPTNC

Available with RPSMA Plug, RPSMA Jack, RPTNC Plug, RPTNC Jack connectors

<b><u>ATS-100-RPSMAJ-RPTNCP-3ft</u></b>	195 Series RPSMA Jack to RPTNC Plug 3' Cable Assembly
<b><u>ATS-100-RPSMAJ-RPTNCP-5ft</u></b>	195 Series RPSMA Jack to RPTNC Plug 5' Cable Assembly



## N-Style to RPTNC

Available with N-Style Jack, N-Style Plug, Right-Angle N-Style Plug, RPTNC Plug, RPTNC Jack connectors

<b><u>ATS-195-RANP-RPTNCP-2ft</u></b>	195 Series Right Angle N-Style Plug to RPTNC Plug 2' Cable Assembly
<b><u>ATS-240-RANP-RPTNCP-10ft</u></b>	240 Series Right Angle N-Style Plug to RPTNC Plug 10' Cable Assembly
<b><u>ATS-240-RANP-RPTNCP-5ft</u></b>	240 Series Right Angle N-Style Plug to RPTNC Plug 5' Cable Assembly



## SMA to SMA

Available SMA Plug, SMA Jack connectors

<b><u>ATS-240-SMAJ-SMAP-10ft</u></b>	240 Series SMA Jack to SMA Plug 10' Cable Assembly
<b><u>ATS-600-SMAJ-SMAP-100ft</u></b>	600 Series SMA Jack to SMA Plug 100ft Cable Assembly



## N-Style to N-Style

Available with N-Style Jack, N-Style Plug, Right-Angle N-Style Jack connectors

<b><u>ATS-NJ-NJ</u></b>	N-Style Jack to N-Style Jack Adapter
<b><u>ATS-NJ-NP</u></b>	N-Style Jack to N-Style Plug Adapter
<b><u>ATS-NP-NP</u></b>	N-Style Plug to N-Style Plug Adapter
<b><u>ATS-NJ-NP-RA</u></b>	Right Angle N-Style Jack to N-Style Plug Adapter



## N-Style to RPSMA

Available with N-Style Jack, N-Style Plug, RPSMA Plug, RPSMA Jack connectors

<b><u>ATS-NJ-RPSMAJ</u></b>	N-Style Jack to RPSMA Jack Adapter
<b><u>ATS-NJ-RPSMAP</u></b>	N-Style Jack to RPSMA Plug Adapter
<b><u>ATS-NP-RPSMAJ</u></b>	N-Style Plug to N-Style Plug Adapter
<b><u>ATS-NP-RPSMAP</u></b>	N-Style Plug to RPSMA Jack Adapter



## N-Style to RPTNC

Available with N-Style Jack, N-Style Plug, RPTNC Plug, RPTNC Jack connectors

<b><u>ATS-NJ-RPTNCJ</u></b>	N-Style Jack to RPTNC Jack Adapter
<b><u>ATS-NJ-RPTNCP</u></b>	N-Style Jack to RPTNC Plug Adapter
<b><u>ATS-NP-RPTNCJ</u></b>	N-Style Plug to RPTNC Jack Adapter
<b><u>ATS-NP-RPTNCP</u></b>	N-Style Plug to RPTNC Plug Adapter





## RPSMA to RPSMA

Available with RPSMA Jack, RPSMA Plug, Right Angle RPSMA Jack connectors

<b><u>ATS-RPSMAJ-RPSMAP-RA</u></b>	Right Angle RPSMA Jack to RPSMA Plug Adapter
<b><u>ATS-RPSMAJ-RPSMAJ</u></b>	RPSMA Jack to RPSMA Jack Adapter
<b><u>ATS-RPSMAJ-RPSMAP</u></b>	RPSMA Jack to RPSMA Jack Adapter
<b><u>ATS-RPSMAP-RPSMAP</u></b>	RPSMA Plug to RPSMA Plug Adapter



## RPSMA to RPTNC

Available with RPSMA Jack, RPSMA Plug, RPTNC Jack, RPTNC Plug connectors

<b><u>ATS-RPSMAJ-RPTNCJ</u></b>	RPSMA Jack to RPTNC Jack Adapter
<b><u>ATS-RPSMAJ-RPTNCP</u></b>	RPSMA Jack to RPTNC Plug Adapter
<b><u>ATS-RPSMAP-RPTNCJ</u></b>	RPSMA Plug to RPTNC Jack Adapter
<b><u>ATS-RPSMAP-RPTNCP</u></b>	RPSMA Plug to RPTNC Plug Adapter



## RPTNC to RPTNC

Available with RPTNC Jack, RPTNC Plug, Right Angle RPTNC Jack connectors

<b><u>ATS-RPTNCJ-RPTNCP-RA</u></b>	Right Angle RPTNC Jack to RPTNC Plug Adapter
<b><u>ATS-RPTNCJ-RPTNCJ</u></b>	RPTNC Jack to RPTNC Jack Adapter
<b><u>ATS-RPTNCJ-RPTNCP</u></b>	RPTNC Jack to RPTNC Plug Adapter
<b><u>ATS-RPTNCP-RPTNCP</u></b>	RPTNC Plug to RPTNC Plug Adapter



## ATS-UPS-15AH-12106P

### 15AH LiFePO4 12x10x6 UPS Battery Backup Solution

**Dimensions** 12"x10"x6" (304.8x254x152.4mm) 9.45"W x 9.59"H (w/o arms)

- Features:**
- Fully integrated unit with charge controller, a 12V 15Ah LiFePO4 Battery
  - Multiple output power option include PoE (802.3af/at) and 12V DC
  - 12"x10"x6" Polycarbonate Enclosure with Solid Door, Latch Lock



## ATS-UPS-30AH-14126P

### 30AH LiFePO4 14x12x6 UPS Battery Backup Solution

**Dimensions** 14"x12"x6" (355.6x304.8x152.4) 9.45"W x 9.59"H (w/o arms)

- Features:**
- Fully integrated unit with charge controller, a 12V 30Ah LiFe PO4 Battery
  - Multiple output power option include PoE (802.3af/at) and 12V DC
  - 14"x12"x6" Polycarbonate Enclosure with Solid Door, Latch Lock

## ATS-UPS-60AH-16148P

### 60AH LiFePO4 16x14x8 UPS Battery Backup Solution

**Dimensions** 16"x14"x8" (406.4x355.6x203.2mm) 9.45"W x 9.59"H (w/o arms)

- Features:**
- Fully integrated unit with charge controller, a 12V 60Ah LiFe PO4 Battery
  - Multiple output power option include PoE (802.3af/at) and 12V DC
  - 16"x14"x8" Polycarbonate Enclosure with Solid Door, Latch Lock

# Power-2-Go Kits

## ATS-POWER2GO-V1

### Power-2-Go V1 for the IBR900

**Dimensions**  
13"x11"x4.5" (330x279x114mm)

- Features:**
- Rugged case with handle
  - Integrated wall charger, 5-in-1 antenna and Accelerator battery pack
  - External ports for operation without opening case
  - Router not included





## **ATS-65W-OD-POE-INJ**

65W 10/100/1000 Outdoor PoE Injector (802.3af/at)

### **Dimensions**

11.02"x8.07"x3.15" (280x205x80mm)

### **Features:**

- Outdoor single port midspan solution
- Supports 802.3af/at powered devices
- Can be powered using DC or AC voltage and comes with built in surge protection



## **ATS-65W-POE-INJ**

65W 10/100/1000 PoE Injector & Line Cord (802.3af/at)

### **Dimensions**

4.84"x2.36"x1.57" (123x60x40mm)

### **Features:**

- Converts AC line voltage into PoE
- Includes in over voltage, over current and short circuit protection



## **ATS-30W-POE-INJ**

30W 10/100/1000 PoE Injector and Line Cord (802.3af/at)

### **Dimensions**

6.89"x3.62"x1.26" (175x92x32mm)

### **Features:**

- Converts AC line voltage into PoE
- Includes in over voltage, over current and short circuit protection
- Supplies 26W to a device and consumes 30W



## **ATS-90W-POE-INJ**

90 Watt 10G PoE Injector and Line Cord (802.3af/at/bt)

### **Dimensions**

6.89"x3.62"x1.26" (175x92x32mm)

### **Features:**

- Converts AC line voltage into PoE
- Includes in over voltage, over current and short circuit protection
- Supplies 26W to a device and consumes 30W

# Power Protection



## **ATS-LP-N-BHJ-P**

N-Style Bulkhead Jack to Plug Lightning Arrestor

### **Dimensions**

11.02"x8.07"x3.15" (280x205x80mm)

### **Features:**

- Bi-directional gas discharge tube lightning arrestor
- Protects equipment from the buildup and discharge of static electricity



## **ATS-SS-64V-10KA-10GBPS-BT**

10GBPS Ethernet Surge Suppressor for 802.3at/at/bt

### **Dimensions**

4.72"x1"x1" (120x25.4x25.4mm)

### **Features:**

- Bi-directional
- Protects equipment from the buildup and discharge of static electricity

# Site Survey Tools

\*\*There is a Universal Adapter with Plugs for the U.S., Australia, Europe and the U.K. available separately



## **ATS-SSBP-0**

The Accelerator Site Survey Battery Pack V0 (non 802.3 Compliant)

### **Dimensions**

5.3"x3.9"x1.7" (135x100x43mm)

### **Features:**

- 24V, 1A PoE Output
- Carrying case
- 48 PoE Passive Output



## **ATS-SSBP-1**

The Accelerator Site Survey Battery Pack V1

### **Dimensions**

5.3"x3.9"x1.7" (135x100x43mm)

### **Features:**

- 24V, 1A PoE Output
- Leather Case with Straps
- 802.3af/at Output



## **ATS-SSBP-2**

The Accelerator Site Survey Battery Pack V2

### **Dimensions**

5.5"x3.9"x1.875" (140x100x48mm)

### **Features:**

- 802.3af/at/bt (Type 3) Output
- Leather Case with Straps
- Up to 20V, 5A USB-C
- 1/4" Threaded insert for DIY Mounting



[www.acceltex.com](http://www.acceltex.com)